

• • • •	us sign (+) inside this box -> +			Patent and Trader	mark Office	e: U.S.	PTO/SB/05 (4/98) ugh 09/30/2000. OMB 0651-0032 DEPARTMENT OF COMMERCE		
Under the Paperv	vork Reduction Act of 1995, no persons a	re required t	_				plays a valid OMB control number.		
	UTILITY			ey Docket No. 9373-11					
PAT	ENT APPLICATION			nventor or Application Id					
	TRANSMITTAL		Tıtle	WIRELESS AUGM	ENTED	RE	ALITY		
	onprovisional applications under 37 C.F.R	2. § 1.53(b))	Expres	ss Mail Label No. EL40	073098	04U	S		
	PPLICATION ELEMENTS upter 600 concerning utility patent applicat	tion contents	;. <b> </b>	ADDRESS TO:	Box Pat	tent A	mmissioner for Patents pplication DC 20231		
1 1 1	ee Transmittal Form (e.g., PTO/SB			5. Microfiche	Computer	r Prog	gram <i>(Appendix)</i>		
2. 🗸 Spe	bmit an original and a duplicate for fee pro ecification [Total Pa eferred arrangement set forth below)		]	6. Nucleotide and/or (if applicable, all			Sequence Submission		
.,,	escriptive title of the Invention			a. Con	nputer Re	eadab	le Copy		
	ross References to Related Applicat tatement Regarding Fed sponsored				• • •	•	ical to computer copy)		
- R	eference to Microfiche Appendix			c. Stat	tement ve	erifyin	g identity of above copies		
1	ackground of the Invention			ACCOMPA	NYING	APP	LICATION PARTS		
- Bi - Do - Ci	rief Summary of the Invention rief Description of the Drawings ( <i>if fil</i> etailed Description laim(s) bstract of the Disclosure	led)	·¬	7. Assignment Papers (cover sheet & document(s))  8. 37 C.F.R.§3.73(b) Statement Power of Attorney  9. English Translation Document (if applicable)  Information Disclosure Copies of IDS					
	awing(s) (35 U.S.C. 113) [Total She		]]	11. Statement Preliminary	(IDS)/PT0 Amendm	O-144 nent	49 Citations		
HEEES A SMA	Newly executed (original or cop.  Copy from a prior application (3 (for continuation/divisional with Box  i DELETION OF INVENTOR Signed statement attact inventor(s) named in the see 37 C.F.R. §§ 1.63(d)  TEMS 1 & 13: IN ORDER TO BE ENTITLED TO LICENTITY STATEMENT IS REQUIRED (37 C.D. IN A PRIOR APPLICATION IS RELIED UPON	37 C.F.R. § 16 complete R(S) ched delete prior appli 0(2) and 1.	ng cation, 33(b).	(Should be * Small Ent Statement( (PTO/SB/09-	ement filed in prior application, us still proper and desired Document(s)				
Prior app For CONTINU	olication information: Examiner  JATION or DIVISIONAL APPS only: The b, is considered a part of the disclosure the incorporation can only be relied upon	e entire disc e of the acc	losure o ompany	IP) of prior applicat  Group  of the prior application, from the prior application or division.	tion No: up / Art Uni om which ional appli	it: an oa	th or declaration is supplied n and is hereby incorporated by		
Custom	ner Number or Bar Code Label	***************************************	************	nch bar code label here)	or 🔽	Cor	respondence address below		
Name	IVAN POSEY, ESQ.								
	DARBY & DARBY P.C.								
Address	707 Wilshire Blvd., 32nd Flo	or							
City	Los Angeles	St	ate	CA	Zip Co	de	90017-3514		
Country	US	Telephoi	1e	213-243-8000	1	Fax	213-243-8050		

Signature

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this sorm should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

43,865

Registration No. (Attorney/Agent)

+

Name (Print/Type) IVAN POSEY, ESQ.

Serial or	Pacent No.:	Heriin Agen et al.
filed or	i saved:	1/-5/99 WIFELEGG AUGMENTED REALITY PROTOTYPE (WARP)
*		VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) and 1.27(d)) - NONPROFIT ORGANIZATION
[ hereby (	dactere that 1	am an official exponered to act on behalf of the nonprofit organization identified below:
Address of	rganizations f Organization rganizations	California Institute of Technology 1200 East California Slvd., Pasadona, CA 91125
•	[ ] [ ] [ 0]	UJIVERSITY OR OTHER INSTITUTION OF HIGHER EDUCATION THE EXEMPT LINGER INSTERNAL REVENUE SERVICE CODE (26 USG 501(a) and 501(a)(3)) HIMPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA (AME OF STATE: )
	[]	(CITATION OF STATUTE: ) WILLD GUALLETY AS TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE (26 USC SOI(a) and SOI(c)(3)) IF LICATED IN THE UNITED STATES OF AMERICA
	r 1	USUED CHALIFY AS HOMPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA IF LOCATED IN THE UNITED STATES OF AMERICA (NAME OF STATE: )  (CITATION OF STATUTE: )
1.9(e) for	r purposes of entitled Wiki	he nonprofit organization (dentified above quelifies as a nonprofit organization as defined in 37 CFR psyling reduced fees under section 41(a) and (b) of Title 35, United States Code with regard to the ELESS AUGMENTED REALITY PROTOTYPE (MARP) by inventor(s) MARTIN AGAN; ANN DEVERAUX AND THOMAS JEDREY
	[] [] [M:	the specification filed herowith.  application serial no., filed.  patent no., issued.
l hereby de to the sbo	ciare that rig ve identifica	ht: under contract or lew have been conveyed to end remain with the nonprofit organization with regard irrention.
Die inventi Zualify au	ion is listed Tiend liens e	te numprofit organization are not exclusive, each individual, concern or organization having rights to below and no rights to the inventor, who could not less concern under 37 CFR 1.9(c) or by any concern which would not qualify as a small business concern topoprofit organization under 37 CFR 1.9(e).
	*NOTE: to the	Superate varified statements are required from each named person, concern or organization having rights invention everying to their status as small entities. (37 CFR 1.27)
full Rose:		
uddress:	***************************************	
		/COURL ( I SMALL BUSINESS CONCERN OKI NONPROFIT ORGANIZATION
nci clownt	the icsus few	to file, in this application or patent, notification of any change in status resulting in loss of the status when any new rule 53 application is filed or prior to poying, or at the time of paying, the cramy quintenance fee due after the date on which status as a small entity is no longer appropriate.
eller are p he like so het such wi	willeved to be ambe are punis illful folce et	l statements made herein of my own knowledge ore true and that all atminents made on information and true; and further that these statements were made with the knowledge that willful false statements and fable by fine or imprisonment, or both, under section 1801 of Title 18 of the United States Code, and staments may jacquardize the validity of the application, any patent issuing thereon, or any patent to ment in directed.
	Adam Cochran	
itle:	The Intellect	Ri Property Counsel
ddress:	1200 East Cal	ifarnia Blvd. Pagedona, CA 91125

#### WIRELESS AUGMENTED REALITY COMMUNICATION SYSTEM 1 RELATED APPLICATIONS 2 This application is based on provisional patent application serial number 60/115,993 filed 3 January 15, 1999. 4 **GOVERNMENT LICENSE RIGHTS** 5 The U.S. Government has certain rights in this invention pursuant to NAS7-1407 6 awarded by NASA. 7 **BACKGROUND OF THE INVENTION** 8 9 1. Field of the Invention The invention is a wireless augmented reality system (WARS) that leverages 10 communications and multimedia information processing microelectronics, along with displays, 11 12 13 14 15 imaging sensors, biosensors, and voice recognition to provide hands-free, tetherless, real-time access and display of network resources, including video, audio and data. Description of the Prior Art and Related Information 2. Online instruction manuals are becoming more prevalent in the industrial and everyday environment. These electronic technical manuals (ETM) may be interactive. Just as with printed 16 17 18 manuals, ETMs may become very difficult to use and maintain in these environments where elements of an environment, such as dust, chemical or general harshness may be detrimental to the electronics and storage devices used to display and operate the ETM. Further, it is not always 1<del>9</del> 20 possible for a worker who requires access to an ETM to stop work to consult ETM. These problems are multiplied in extraterrestrial environments such as a space shuttle or a 21 space station. During intra and extra vehicular activities, it may be virtually impossible to access 22 a traditional keyboard and computer display to access an ETM. For example, during a satellite 23 repair mission, it would not be practical for an astronaut in a bulky extravehicular space suit to 24 type commands on a keyboard to view a display in the extreme environment of outer space where 25 26 the sun glare may make viewing impossible. Hands-free portable computers have been implemented in an attempt to solve some of 27 these problems. For example, U.S. Patent Nos. 5,305,244 and 5,844,824 describe systems in 28 which a head-up display and voice recognition is implemented in a portable computer for 29

displaying ETM. However, these systems, being a single user-to-computer paradigm, do not

30

allow multiple-user access to multiple computers, multimedia devices or nodes on a network for accessing arbitrarily-selected data channels. Further, these previously-described systems are self contained and their data storage needs to be updated periodically to be sure that the latest data is displayed. Further, these systems do not allow two-way communication over local and wide area networks to other mutli-media users and devices, and do not provide real-time biomedical information about the physical condition of the user.

There is thus a need for a wireless, wearable communications system allowing two-way voice, video and data communication between local users and to remote users and devices over network nodes, along with tetherless real-time monitoring of the local user's physical condition.

#### SUMMARY OF THE INVENTION

The system solves the above problems with prior art systems with an adaptive wireless remote access network comprised of small individual portable access units linked to a local cellular general purpose node. Interlinked general purpose nodes support communications across different habitat modules or internal-to-extravehicular communications, in the case of the space environment; terrestrial wired networks such as the Internet can serve as the interconnection of remotely scattered access nodes in an industrial, commercial or home environment application.

The system may provide shuttle and international space station astronauts with tetherless, on-demand access to data channels from multimedia devices such as cameras or audio sensors associated with other persons or in a stand-alone configuration, and multimedia or data display from a networked computer terminal and to the equipment control capabilities which may be available through that computer. Transparent to such access, the system can maintain a data channel for monitoring an astronaut's health or environment via in-situ sensors. Though this system may be used for the shuttle and the international space station, the system has uses in many possible applications related to medical, industrial, and commercial areas.

The invention is a personal communications system designed especially for the space shuttle or station environment to provide cellular communications access throughout the vessel with video, audio, data and computer connect services. A small, wearable portable access unit (PAU) communicates over high-rate link to a centrally-located network access unit, called a general purpose node herein. The system backbone provides 2-way video, 2-way audio, and a multi-purpose data channel between the PAU and general purpose node. One embodiment of the

PAU used for personal communication has an attached headset with video display, audio feed and camera, which together may be used for audio or video teleconferencing. When used as a virtual terminal to a computer in the network, the user is able to view and manipulate imagery, text or video, using voice commands to control the terminal operations.

Using the system, an astronaut may efficiently operate and monitor computer-controllable activities inside or outside the vehicle or station. Hands-free access to computer-based instruction texts, diagrams and checklists replaces juggling manuals and clipboards, and tetherless computer system access allows free motion throughout a cabin while monitoring and operating equipment. Along with voice commands, an integrated "touchpad" on the PAU may be used for remote computer control through a sensor data channel; this return data channel may also be used for other control data as from a three-D mouse or data glove input device, allowing the real-time video display to be used for remote, wireless monitor and control of robotic cameras or manipulators.

Concurrent with information provided to the astronaut, the system also allows external observation of the astronaut's situation; personal biological or other sensors can send back continuous telemetry through personal access unit and general purpose node. A miniature camera integrated into the headset provides real-time video of the wearer's field of view to remote observers. In this way, for example, a principal investigator located on Earth may consult with a payload specialist on the operation or troubleshooting of their equipment.

The system provides wireless high-rate data exchange. The radio link is adapted to operate within a high-interference, high-multipath environment of a space shuttle or space station module. Radio frequency (RF) links do not require visual line-of-sight to operate, but the metal walls and lack of RF absorbers, combined with moving human bodies, creates an enormous potential for destructive self-interference of the radio signals. The integrated radio and multimedia data processing technology provides for efficient and high-quality video and audio data compression for noisy indoor communications channels. The system supports multiple-user access for video, audio, and sensor data services in the wireless coverage area. Potential applications of the system are in any environment where heads-up, hands-free information retrieval or multimedia communications access improves efficiency including tetherless operations/monitor consoles, remote consultations in medical or maintenance

procedures, and hazardous/confined space activities. There are also in-the-home entertainment/communications applications.

Similar to the space extravehicular activities applications, bio-isolation suits have similar operation constraints to space suits. They are worn commonly where there are chemical or biological contaminates, and any extraneous materials brought into a chamber, such as clipboards or documents, also present a contamination risk. A unit suitably modified for use in a space suit could be used in this situation. This allows the user to use a computer (log data, use a check list, etc.), to communicate with colleagues, including providing first-hand video of work in progress, and to maintain constant monitoring of the health of the user.

An extension of the medical applications areas would be in remote telemedicine. Many medical diagnostic and treatment tools are being made portable and rugged enough to be taken to remote sites. Some examples are an ultrasound unit that is the size of a backpack, an entire intensive care unit of equipment built into a stretcher, and a trauma pod built into a cruise missile. For many of these devices, CRT or LCD panels comprise a significant amount of the bulk and weight of the devices. The system of the present invention may provide a replacement for the CRT or LCD panel as well as an interface to the control system of the device, while providing communications access through an interface to the remote site's existing communications equipment.

Industrial applications include use by inspection or maintenance crews in remote or dangerous environments such as oil refineries, drilling rigs, power plants, etc., where the personnel can move around with their hands and peripheral vision free to attend to their own safety and tasks. They would be in constant contact with the information they needed and any technical assist could be given by individuals looking at the return video images from the user.

An example of a commercial application is for mission control and other operations personnel who presently must sit at a display console for hours at a time. These individuals could make use of the system of the present invention to increase their mobility and efficiency.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagrammatic illustration of the components of the system of the present invention; Fig. 2 is block diagram illustrating communications components used by the personal access unit and general purpose node of the system of Fig. 1; and Fig. 3 is a flowchart illustrating a method performed using the system of Fig. 1.

# DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

With reference to Fig. 1, a diagram illustrating components of the system of the present invention is shown. The system may comprise small pager-like devices called portable access units 100. The portable access units 100 are accessorizable for different "multimedia" interfaces for display, camera, audio and sensor operation. Another embodiment of the portable access unit 100a comprises a wearable headset and microphone assembly 102a.

The portable access units 100-100a interface directly through wireless link with a network through a general purpose node 150. The general purpose node 150 allows wireless-to-wire communication with a local network 170. The local area network 170 may be electrically connected to a wide area network or Internet 172 in order to connect to remote local area networks 174. Alternatively, the general purpose node 150 may be directly connected to the wide area network 172. The general purpose node 150 may thus act as a router for routing video, display, audio and control data packets between the portable access units 100 and other, or remote, portable access units 100 or remote media devices 125, 180, etc connected to the networks 170-174. The connection with a network 170-174 may occur directly in electrical connection with one of the networks 170-174, or in wireless communication through a remote general purpose node 150a that is electrically connected to the network. The portable access units 100 may provide communication to and from remote media devices comprising computers 180-182 running specialized client software or certain commercial multimedia Internet software products such as video conferencing products that adhere to the industry standard H.323 for multimedia data transfer.

Each portable access unit 100-100a may dynamically associate with the closest general purpose node 150-150a when it is logged on to the network 170-174 or is connected thereto. Each general purpose node 150-150a records the associations and registers each portable access unit 100-100a on a list of connections associated with the particular general purpose node 150-150a. The list of connections is stored in a random access memory device included in the general purpose node 150-150a. When a portable access unit 100 is logged off or disconnected from the network 170-174, it is disassociated from the particular general purpose node 150-150a that it was associated with, and thus, is removed from the list of connections.

As shown on an example selection list screen 190 that may be presented on a display 102 or headset 102a on any of the portable access units 100-100a, the user can set up a video, audio, 2 or data link with any other portable access unit 100-100a or remote media device 125, 180, etc, that is logged onto a network 170-174. The headset 102a may comprise a heads- up display (120 4 in Fig. 2) inside a headset embodying a transparent color LCD device. Using control keys or 5 voice commands, a user of the portable access unit 100-100a may select a local or remote 6 portable access unit 100-100a on a selection list 190 of other portable access units 100-100a or 7 media devices 125, 180. The selection list 190 comprises a combination of the lists of 8 connections stored on all of the general purpose nodes 150-150a. Users may further access a 9 nameserver located on the access node 150 for locating remote unfamiliar portable access units 10 100-100a or remote media devices. 11

1

3

17 18

19 20 21

22

23

24

25

26

27

28

29

30

By selecting entries from the selection list 190, users may communicate with portable access units 100-100a or various media devices such as cameras 125, internet phones 104, one or more computers 180-182 located throughout the networks 170-174. A user may further select from the list 190 user names representing users of other portable access units 100 that are logged in and associated with remote general purpose nodes 150a connected to the networks 170-174.

With reference to Fig. 2, the components of the access node 150 and the wearable headset embodiment of the portable access unit 100a is shown. Elements for both the general purpose access node and portable access unit 100a include a communications device 202. Data processing functions are implemented in the form of an audio/video coder/decoder (codec) pair 200, one codec 200 comprising part of the portable access unit 100a and the other codec 200 being part of another portable access node 100a or remote media device for which it is desired to exchange signals. At a portable access node, the codec 200 controls a digital data stream which is fed to the communications device 202, which is implemented as an RF modem transceiver pair with an equivalent communications device 202 located in the general purpose access node. The codecs 200 serve as the interfaces to the external elements (including possibly the user display 102a and the sensor 104) on both sides of the communication continuum comprising the communications device 202 of the general purpose node 150, an internal network interface protocol circuit 152, the external networks 170-174 and the electrical connection or general purpose access node connection to the desired remote portable access node or media device. .

The internal network interface protocol circuit 152 may comprise an Ethernet chip, memory and 1 a network protocol chip. With this architecture, the system addresses the issues of multiple-2 access and data channel quality, through the implementation of the communications device 202. 3 Multiple implementations of the communication device 202 in the general purpose node 150 4 allows for multiple simultaneous communication links with a plurality of portable access units 5 6 100-100a for the general purpose node 150. With the base functionality of the communications device 202 and codec subsystem 200, 7 the architecture provides flexibility in utilization of different external components such as 8 different headset 102a configurations, sensor 104 packages, and network interface 152 9 10 capabilities. The communication device 202 is designed to operate in a high multipath space station or 11 terrestrial indoor environment while being able to support multiple users at high, multimedia-12 13 14 15 type bandwidths. Thus the communications device's 202 physical (PHY) and media access (MAC) layers in combination support multiple access, dynamic network association, channel error rates of broadcast video quality (1x10e-6), and data rates up to broadcast-quality video bandwidths (on the order of 768 kbps per user (one-way)). Modulation to achieve this 17 18 performance will be differential phase-shift keying, of binary or higher order (quadrature or highorder quadrature amplitude modulation); the order chosen reflects the necessary user data volume 19 to be supported within fixed, FCC-specified bandwidth allocations. Orthogonal frequency division multiplexing, code division multiple access, and frequency hopping/time division 20 21 multiple access may be used for achieving multiple access. Spread spectrum, channel equalization, antenna diversity and retransmission techniques may also be used for improving the 22 reliability of the communications link. Through a combination of these technologies, two-way 23 multimedia channel throughputs can be achieved for each of multiple simultaneous users. A 24 variety of RF frequencies may be used, but the determining factor in frequency band selection is 25 the availability in the band of a relatively large amount of spectrum in the space station or FCC 26 terrestrial allocations, allowing the transmission of compressed video. Ranges in the 2.5 to 5.7 27

required at these frequencies, and the potentially low amount of interference that will be

band range are preferable due to the FCC bandwidth available, the compactness of RF elements

sustained. The RF front end of both the portable access unit 100-100a and general purpose node

28

29

30

150-150a may be interchangeable with different frequency front ends for system use in different 1 2 frequency bands.

Low-rate, single user implementations of the communications system may be effected 3 through adapted commercial wireless-LAN type products following the FCC 802.11 standard 4 such as a frequency-hopping 2.4 GHz wireless LAN transceiver by Waveaccess, Inc of 5 Wellesley, MA, or direct-sequence spread-spectrum 2.4 GHz wireless LAN chipset by Harris 6 Prism of Melbourne, FL. These radio implementations, as with commercial implementations of 7 the industry-proposed Bluetooth and HomeRF standards, will be limited in user access and 8 overall throughput, however, and therefore unsuitable to real-time video teleconferencing for 9 multiple users. The preferred embodiment for full capability is to implement the 10 communications devices' physical and media access control layers in custom ASIC circuits 11 allowing for support of all system capabilities within microelectronics architecture for small size 12 13 14 15 16 17 18 and low power draw, providing pager-type form factor of wearable personal access units 100-100a.

The communications device 202 comprises a buffer memory and a radio frequency front end. Data modulation/demodulation circuits and error detection/correction protocol circuits are further included. Various combinations of these circuits may be obtained from Proxim of Sunnyvale, California, Harris of Melbourne, Florida and Stanford Telecom of Stanford, California. Alternatively, all of the various circuitry may be implemented with an application specific integrated circuit (ASIC), or a combination of an ASIC and discrete elements for size and weight efficiency.

19 20 21

22

23

24

25

26

27

28

29

30

Three classes of headsets 102a may be used: hi-resolution military systems which are CRT based and may be provided by Honeywell of Morristown, New Jersey, or Hughes Network Systems of San Diego, California; medium resolution industrial systems which are CRT or LED based scanners and may be provided by Intervision of Santa Clara, California; or low to medium resolution entertainment systems which are color viewfinder LCD based systems that may be supplied by Virtual Vision of Redmond, WA (the V-CAP and E-GLASS), Sony Europe of Hampshire, United Kingdom (GLASSTRON VISOR) or Olympus of San Jose, California. Typical headset display 120 specifications for the portable access unit 100a include the following:

- RESOLUTION: Comparable at least to VGA (640x480) or better to 1280 x 1024 1 w/off-the-shelf display & I/O configuration 2 - DISPLAY: >10 FL/day, Display Bright. Ratio: >2, Brightness range: 2 OOM<sub>max</sub> 3 - FOV: 40-60 deg ,Gray scale: >12 4 - EyeRelief: 20-26 mm TSP,14/10mm(on/off-axis) exit pupil 5 - Unif: 2:1 across 2/3 FOV, GLARE:< 2.5% image content, PixelContrast:25 6 - FOCUS: Hands off, Obs:, % look- around ,Diopter range: ±2, 7 - Mag: 1± p5%, Cont: >95%, motion sensor 10°cone, Inter. Eye. adj: 52-72mm 8 - Image Enhan & IFF: Weaponsight, motion sensor and computer interface 9 The audio/video codec 200 in a portable access unit 100-100a or other client device is 10 based around a single chip, standards-based codec that accepts analog or digital audio and video 11 (i.e. NTSC or VGA) compresses this input, and multiplexes the compressed data with an external 12 13 14 15 16 17 18 data stream. The preferred industry standards are: ITU H.263 based video, ITU G.722 based audio, and ITU H.221 based multiplexing. The audio video codec 200 in the portable access unit 100-100a can establish a link with a similar audio/video codec 200 associated with another portable access unit 100-100a or a remote media device 104, 125, 180 or 182. The signals from the codec 200 in the portable access unit 100a outputs the received and decompressed remote signals from the device for which the link was established. The interface between the codec 200 19 and communication device 202 as well as between the communication devices 202 of the general purpose node 150-150a and portable access unit 100-100a operate two-way with a high 20 21 bandwidth suitable for transmitting video. Of this bandwith, the audio portion utilizes up to 64 kbps and the data from the sensor 104 utilizes the required amount for the type of sensor 104, 22 with the remainder allocated to compressed video. The quality of the video at these data rates in 23 excess of 128 kbps is at least equivalent to video teleconferencing quality video. 24 The audio/video codec 200 portion of the portable access unit 100-100a may further 25 comprise video input and output ports, audio input and output ports, data input and output ports, 26 and a the above-mentioned multimedia processor chip for packaging signals for data 27 compression and decompression for transmission. Exemplary multimedia processors include the 28 VCPEX chip by 8x8, Inc. of Santa Clara, California or digital signal processing chips by Texas 29 Instruments and others. The audio/video codec 200 further comprises a field processor gate 30

array, electrically programmable read-only memory and random access memory for processing and packaging signals for compression and decompression

28.

The sensor 104 may comprise a commercially available pulse oximeter sensor or other type of bio-sensor. A pulse-oximeter sensor allows the measurement of pulse rate and oxygen saturation of the blood. Data from the sensor 104 is transmitted to the general purpose node 150-150a, and transmitted to any remote media device connected to any of the networks 170-172. The sensor 104 may comprise an "on body" wireless human performance and fatigue monitoring system that communicates with a belt-mounted transceiver/control module. The remote media device may comprise a processor 180-182 for display or logging of the real-time sensor signals.

The headset 102a comprises a heads-up display 120 comprising a transparent color LCD device for video signals received and processed by the codec 200. The headset 102a may further comprise, or have attached thereto, an integrated microphone 122 for receiving voice commands from the user of the portable access unit 100a or for communicating voice signals to a remote portable access unit 100 or remote media device. The headset may further comprise a speaker 124 or earpiece unit for presenting audio signals to the user. The portable access unit 100a may further comprise a digital camera 106 that may either be attached on the user's person, or to the headset 102a for providing video signals to other portable access units 100-100a or media devices.

With reference to Fig. 3, a flow diagram illustrating the method performed by the system of Fig. 1 is shown. A user puts on the headset 102a, portable access unit 100a, step 400. The user may log into the local general purpose node 150 wherein the portable access unit associates with the general purpose node 150 such that the user is added to a connection list stored in a random access memory device residing in the general purpose node 150, step 401. Data is provided from the general purpose node 150 to the portable access unit through the communication devices 202, step 402. The user is presented with a selection list 190 of portable access units 100-100a and media devices logged onto the system on the display 120, step 404. The user selects one of the entries from the selection list, step 406. The selection is transmitted to the general purpose node 150, step 408. The general purpose node 150 sets up a connection over the networks 170-174 for channeling data between the portable access unit 100a and the selected network device, step 410. The selected network device may comprise the processor 180

- or other network client 182 for running a software application, a camera 125 for providing remote viewing operations to the user on the display 120, the Internet phone 104 for providing voice communications with the a remote user, or another portable access unit 100-100a over a remote general purpose node 150a. By providing control commands to the microphone 122 or other input system, such as a keyboard or handheld mouse, the user may conduct operations by transmitting commands between the portable access unit 100a and the general purpose node 150 which routs the control commands to the device that the user selected, step 412.
  - It will thus be seen that changes may be made in carrying out the above system and method and in the construction set forth without departing from the spirit and scope of the invention, it is intended that any and all matter contained in the above description and shown in the accompanying drawings shall be interpreted as illustrative and not in a limiting sense.

8

9

10

11

### WHAT IS CLAIMED IS:

1	1.	A communication system for communicating through a network, comprising:
2		a general purpose node electrically connected to the network for providing access
3		through the network, the general purpose node having a communication device;
4		at least one media device connected to the network; and
5		a portable access unit capable of wirelessly communicating with the general
6		purpose node for communicating with the media device through the network.
1	2.	The system of claim 1, wherein the media device comprises a camera for providing video
2		signals for display on the portable access unit.
1	3.	The system of claim 1, wherein the media device comprises a display for receiving video
		signals transmitted from the portable access unit for presenting on the display.
	4.	The system of claim 1, wherein the media device comprises a speaker for receiving audio
- -2 ∏		signals transmitted from the portable access unit for presenting on the speaker.
1	5.	The system of claim 1, wherein the media device is a microphone for transmitting audio
<u>2</u>		signals to the portable access unit for presenting on a speaker attached to the portable
		access unit.
1	6.	The system of claim 1, wherein the media device comprises processor.
1	7.	The system of claim 6, wherein the portable access unit is for providing commands for
2		controlling the processor.
1	8.	The system of claim 7, wherein the processor is for providing commands for controlling
2		remotely controllable hardware.

The system of claim 1, wherein the portable access unit further comprises a sensor for 9. 1 transmitting data signals collected by the sensor to the media device. 2 The system of claim 9, wherein the sensor comprises a biological sensor. 10. 1 The system of claim 9, wherein the sensor comprises an environmental sensor. 11. 1 The system of claim 1, wherein the media device comprises a sensor for transmitting 12. 1 signals comprising data collected by the sensor to the local portable access unit. 2 The system of claim 12, wherein the sensor comprises a biological sensor. 1 13. The system of claim 12, wherein the sensor comprises an environmental sensor. 14. Ü ļ, ij 4 The system of claim 1, wherein the media device is wirelessly connected to the network. 15. ĻM 1 The system of claim 1, wherein the media device is electrically connected to the network. 16. ı, ş The system of claim 1, comprising a plurality of portable access units capable of ...≅1 17. 2 wirelessly communicating with the general purpose node for communicating with the one or more media devices through the network. 3 The system of claim 17, comprising a plurality of general purpose nodes, each local 1 18. general purpose node for communicating with a subset of the plurality of portable access 2 3 units. The system of claim 18, wherein each portable access unit is for dynamically associating 1 19. and de-associating with one of the plurality of general purpose nodes. 2

- The system of claim 19, wherein each portable access unit is adopted for listing on a display the plurality of portable access units that are associated with the plurality of general purpose nodes.

  The system of claim 19, wherein each portable access unit is adopted for listing on a display the plurality of media devices.
- The system of claim 21, wherein each portable access unit is adapted to present on the display the biological data for a user of at least one of the other portable access units after selecting the at least one other portable access unit displayed in the list.
  - 23. A method for communicating through a network with least one media device connected to the network, comprising:

6 7 8

1

2

providing access to the network with a general purpose node electrically connected to the network, the general purpose node having a wireless communication device; and

communicating wirelessly with the remote media device through the general purpose node and the network with a portable access unit that is in wireless communication with the general purpose node.

- 24. The method of claim 23, comprising receiving video signals from the media device for providing video signals for display on the portable access unit.
- 1 25. The method of claim 23, comprising transmitting video signals from the portable access 2 unit to the media device for presenting the video signals on the media device.
- The method of claim 23, comprising transmitting audio signals from the portable access unit to the media device for presenting the audio signals on the media device.

The method of claim 23, comprising receiving audio signals captured by the remote 1 27. media device from the remote media device for presenting on the portable access unit. 2 The method of claim 23, comprising transmitting commands from the portable access 28. 1 unit to the media device for controlling the media device. 2 The method of claim 23, comprising receiving data captured by a sensor on the media 29. 1 2 device. The method of claim 23, comprising dynamically associating and de-associating the 1 30. portable access unit with the general purpose nodes. 2 12111 The method of claim 30, comprising presenting a list of a plurality of portable access 31. units on a display that are associated with the general purpose node. The method of claim 31, comprising listing on the display a plurality of media devices 32. 2 1 2 associated with the general purpose node. The method of claim 23, comprising presenting biological data for a user of one of a 33. plurality of portable access units after selecting the user's name from a list of users of the 3 plurality of portable access units.

#### WIRELESS AUGMENTED REALITY COMMUNICATION SYSTEM

2 ABSTRACT

11 12 13

 The system of the present invention is a highly integrated radio communication system with a multimedia co-processor which allows true two-way multimedia (video, audio, data) access as well as real-time biomedical monitoring in a pager-sized portable access unit. The system is integrated in a network structure including one or more general purpose nodes for providing a wireless-to-wired interface. The network architecture allows video, audio and data (including biomedical data) streams to be connected directly to external users and devices. The portable access units may also be mated to various non-personal devices such as cameras or environmental sensors for providing a method for setting up wireless sensor nets from which reported data may be accessed through the portable access unit. The reported data may alternatively be automatically logged at a remote computer for access and viewing through a portable access unit, including the user's own.

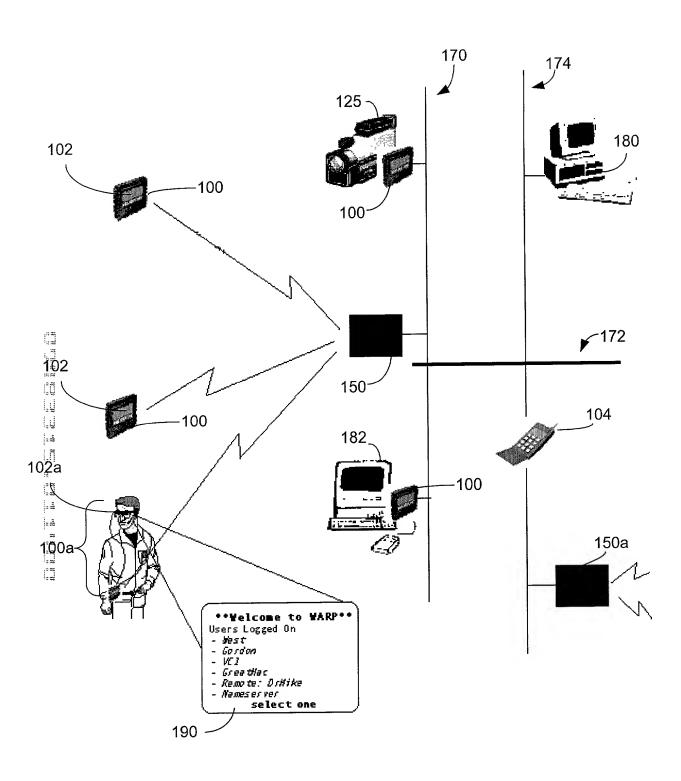


Fig. 1

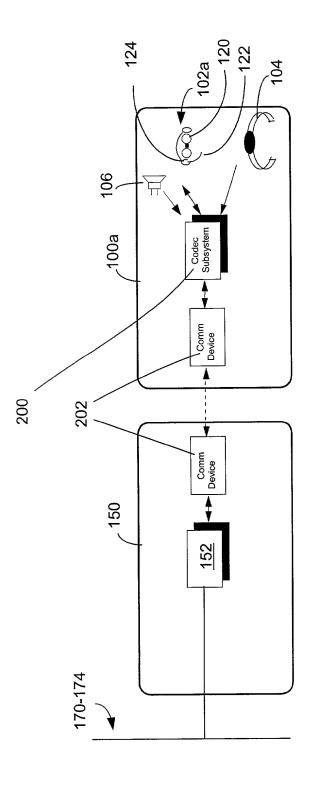


Fig. 2

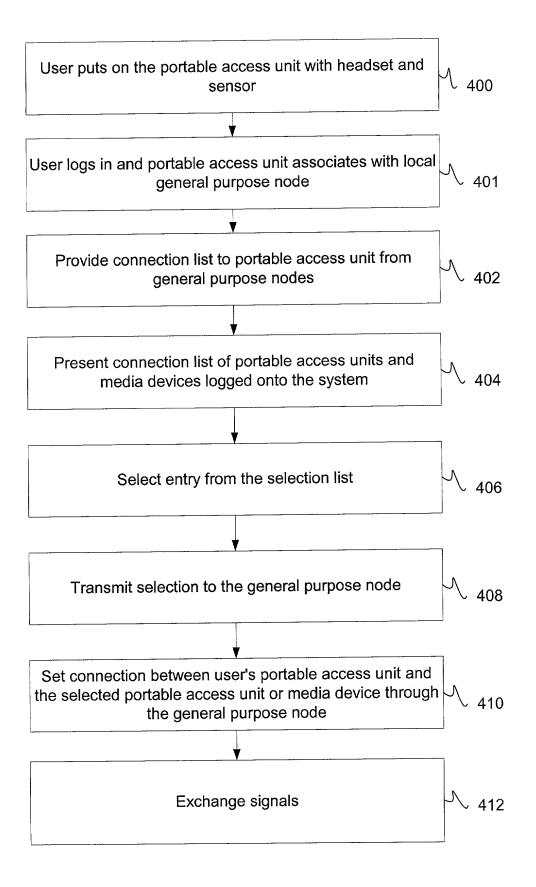


Fig. 3

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE re required to respond to a collection of information unless it contains

			Attorney Docket Num	9373-1F888US1				
DECLARATION FOR UTILITY OR DESIGN			First Named Inventor	ANN DEVEREAUX				
PATE		PPLICATION	COMPLETE IF KNOWN					
(37 CFR 1.63)			Application Number		/			
Declaration Submitted		_	Filing Date		01-14-2000			
	OR Declaration Submitted after li		Group Art Unit					
with Initial Filing		Filing (surcharge (37 CFR 1.16 (e)) required)	Examiner Name					

As a below named inventor, I hereby declare that:										
My residence, post office address, and citizenship are as stated below next to my name.										
! believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:										
WIRELESS AUGMENTED REALITY COMMUNICATION SYSTEM										
the specification of which (Title of the Invention)										
is attached hereto OR										
was filed on (MM/D	D/YYYY)	as Unite	d States Applica	tion Number or PCT International						
Application Number	and wa	as amended on (MM/DD/Y	YYY)	(if applicable).						
I hereby state that I have re	viewed and understand the	contents of the above iden	tified specificatio	n, including the claims, as						
	nt specifically referred to abo		4-54 07 OF	'D 4 50						
I acknowledge the duty to d	lisclose information which is	material to patentability as	defined in 37 CF	R 1 00.						
I hereby claim foreign prionty benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.										
Prior Foreign Application	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached? YES NO						
Number(s)	Country	(MMI/DD/1111)	Not Glanned	7E3 NO						
		<u> </u>								
Additional foreign application	ation numbers are listed on a	supplemental priority data	sheet PTO/SB/0	02B attached hereto:						
	ınder 35 U.S.C. 119(e) of an		l application(s) lis	sted below.						
Application Number	<del>```</del>	e (MM/DD/YYYY)								
60/115,993	01-	15-1999		onal provisional application ers are listed on a						
			supple	emental priority data sheet						
			PTO/S	SB/U2B attached hereto.						
00/110,993	01-	10-1333	numb supple	ers are listed on a						
d										

[Page 1 of 3]
Burden Hour Statement. This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO. Assistant Commissioner for Patents, Washington, DC 20231.

ALL ALL BRANKE 12 ı, Ž . #3

	$\overline{}$	PTO/SB/01 (12-97
Please type a plus sign (+) inside this box 🔫	+	Approved for use through 9/30/00. OMB 0651-003
		Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCI

Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

# **DECLARATION** — Utility or Design Patent Application

-	-		-											
United States United States of Information who	of Americ or PCT Int iich is mat	t under 35 U.S.C a, listed below a ernational applica erial to patentabi international filing	nd, inso ation in ility as o	ofar as the the manner defined in 3	subj pro 37 Cl	ect matter of vided by the FR 1.56 wh	of each	h of th aracra	e claim oh of 3	is of thi	s applica ), 112, Li	ation is acknow	not disclosed ledge the duty	in the prior to disclose
U.S. Parent Application or PCT Parent Number						Parent Filing Date P (MM/DD/YYYY)					rent Patent Number (if applicable)			
Additional	US. or P	CT international	applicat	tion number	s are	e listed on a	supple	ement	al prion	ty data	sheet PT	O/SB/0	2B attached he	ereto.
As a named inv	entor, I he	ereby appoint the	followi	ng registere	d pr	actitioner(s)	to pros	secute	this ap	plicatio	n and to	transac	t all business i	n the Patent
and Trademark	Office co	nnected therewith	-	Customer N	Numi	ber					<b>→</b>	٠	Place Custo Number Bar	
				OR Registered	prac	ctitioner(s) n	ame/re	egistra	tion nur	mber lis	ted belov	" L	Lahel her	
	Name	3		Re		ration				Nam				tration nber
Name														
Additional	registered	practitioner(s) na	amed o	n suppleme	ental	Registered	Practiti	ioner l	nforma	tion she	et PTO/	SB/02C	attached here	to.
	☐ Additional registered practitioner(s) named on supplemental Registered  Direct all correspondence to: ☐ Customer Number or Bar Code Label												ondence addr	
Name	IVAN	POSEY, ES	POSEY, ESQ.											
Address	DARB	Y & DARBY	′, P.C											
Address	707 W	ILSHIRE BO	OULE	VARD,	32r	nd FLOC	R				,			
City			ANG	ELES			Sta	ate	CA <sub>ZIP</sub>				90017	
Country		US		Telep	hon	ne (2	213) :	243-	8000	)	Fax	(	213) 243-8	3050
believed to be punishable by	true; and fine or in	I statements mad I further that the oprisonment, or I t issued thereon.	se state both, u	ements wer	re m	iade with th	ie knov	wiedae	e that w	vilitul tai	ise state	ments	and the like so	mage are
Name of S	ole or F	irst Inventor	r:				□ A	petiti	ion has	s been	filed for	r this u	insigned inve	ntor
G	iven Nar	ne (first and mi	iddle [if	f any])			Family Name or Surname							
		ANN					DEVEREAUX							
Inventor's Signature													Date	
Residence:	City	TUJU	NGA	Sta	ate	CA	Co	ountry	untry		US		Citizenship	
Post Office	Address													
Post Office	Address													
City		TUJUNGA	State	CA		ZIP					Cou	ntry	US	3
Additions	linvonto	re are being na	amed c	on the 1	en	nnlements	i Δddi	itional	Unven	itor(s) s	sheet(s)	PTO/	SB/02A attac	hed hereto

valid OMB control number.

## **DECLARATION**

### ADDITIONAL INVENTOR(S) Supplemental Sheet Page 3 of 3

Name of Additional Joint Inventor, if any:  A petition has been filed for this unsigned inventor											
Given Nan	ne (first and middle [if any])		Family Name or Surname								
		JEDREY									
Inventor's Signature											
Residence: City	PASADENA	State	CA	<u> </u>	Country	US		Citizenship			
Post Office Address	ess										
Post Office Address								<b>,</b>			
City	PASADENA State CA				ZIP		Count	ry	บร		
Name of Additional Joint Inventor, if any:								entor			
Given Nan	ne (first and middle [ıf any])				Family Name or Surname						
MARTIN					AGAN						
Inventor's Signature								Dat	е		
Residence: City	PASADENA	State	CA	\	Country	US		Citizer	Citizenship		
Post Office Address									_		
Post Office Address					<del></del>		<del></del>				
City	PASADENA	State		A	ZIP		Cou	intry		US	
Name of Addition	nal Joint Inventor, if an	y:			A petitio	n has been file	d for t	his unsign	ed inv	entor	
Given Nar	me (first and middle [if any]	)			Family Name or Surname						
Inventor's Signature								Da	te		
Residence: City			Country Citizenship								
Post Office Address				<u>.</u>				<del>, , , , , , , , , , , , , , , , , , , </del>			
Post Office Address	1				<del></del>						
City	State ZIP Country										

Burden Hour Statement. This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.